


**Set up of the VAS701001
(Recommended maximum distance for ADR)**

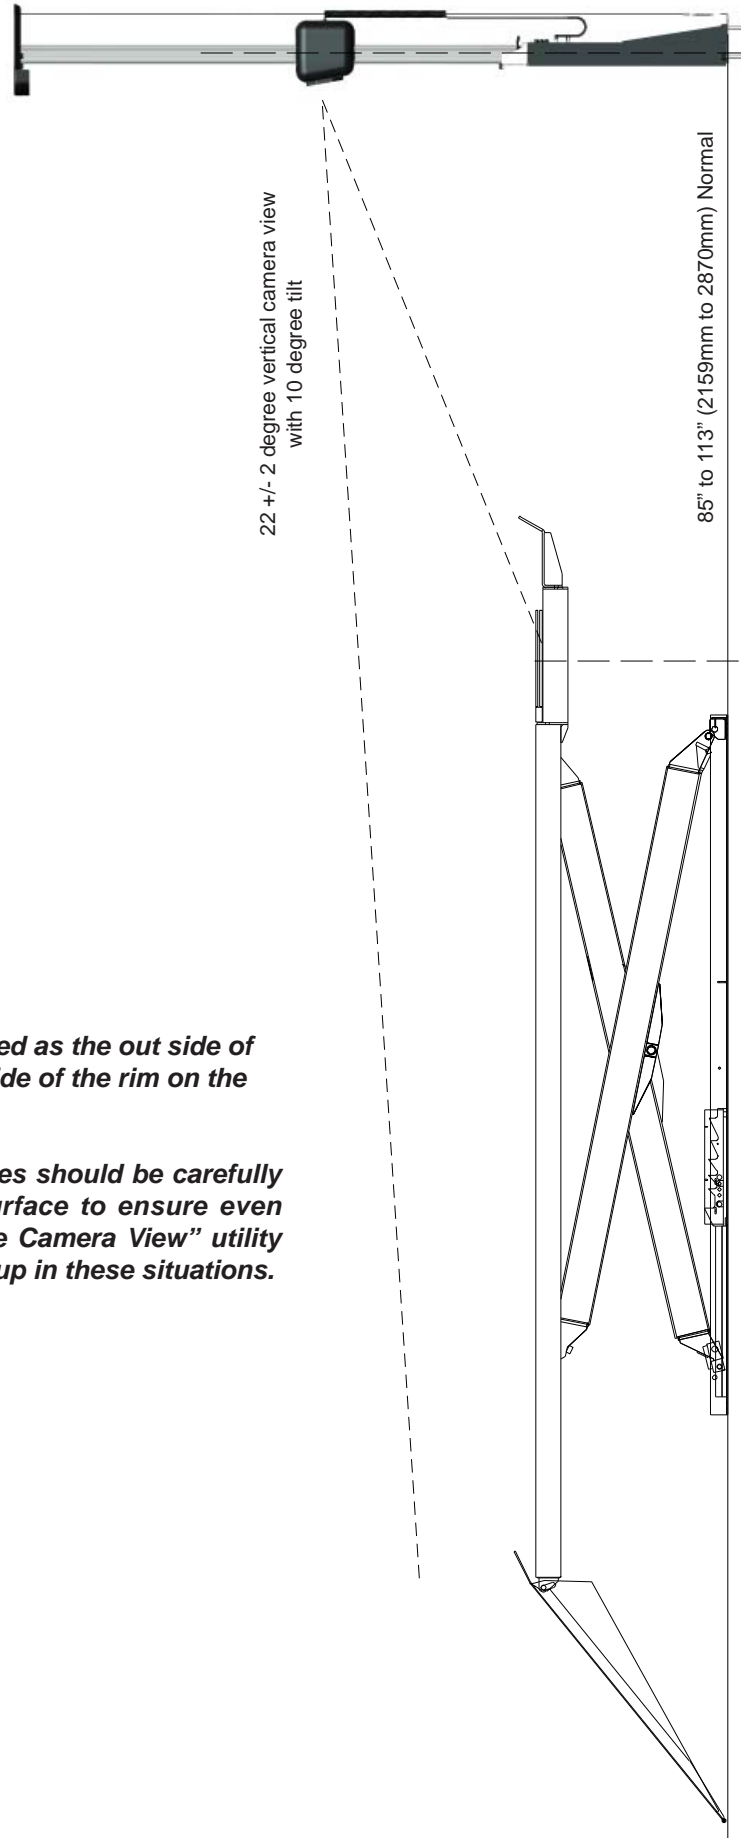

NOTE: "Vehicle Width" is defined as the out side of the rim on one side to the outside of the rim on the other side of the front wheels.

NOTE: Narrow and wide vehicles should be carefully centered on the alignment surface to ensure even camera view. Use of the "Live Camera View" utility is recommended when setting up in these situations.

Set up of the VAS701001 (Recommended maximum distance for ADR)

